FS OR-G-LU1

FS OR-G-LU3

100" width

100" width

Luna 2 10' x 20' Truss System Dye Sub Printed

TEMPLATE IS @ 1/2 SCALE
Panels LU1 and LU3:
Total Graphic Area: 102.25"w x 10"h
Finished Size: 98.25"w x 6"h
Visual Size: 98.25"w x 6"h

Panels LU2 and LU4:
Total Graphic Area: 104"w x 87.75"h
Finished Size: 100"w x 83.75"h
Visual Size: 98.25"w x 6"h

Template requires 1" bleed around the perimeter (2" around the perimeter when scaled to 200% and printed)

FS = Graphic is front side mounted
(3/4" w velcro is applied to the back
of the panel)
BS = Graphic is back side mounted
(3/4"w velcro is applied to the front
of the panel)
Notching = 7/8" square that is cut into the
appropriate location.
Hinging= 3/4" strip of material that is created
by notching the graphic. Allows two graphics
to share the same extrusion corner.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 200-240 ppi @
 1/2 size, 100-120ppi @ 100% size
- All fonts must be created to outlines
- Do not scale artboardBackground color/images must
- bleed to the edge of artboardDo not use spot colors from template in your artwork as they will not print

FS OR-G-LU2


panel is notched on top left and right corners

FS OR-G-LU4

panel is notched on top left and right corners

FC OR-G-LU1

Luna 2 10' x 20' Truss System Dye Sub Printed

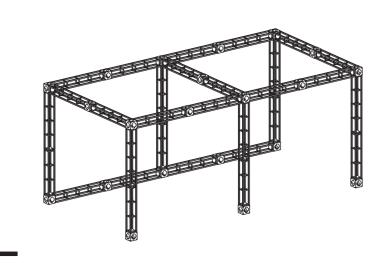

TEMPLATE IS @ 1/2 SCALE

Panels LU1 and LU3: Total Graphic Area: 102.25"w x 10"h Finished Size: 98.25"w x 6"h Visual Size: 98.25"w x 6"h

Panels LU2 and LU4: Total Graphic Area: 104"w x 87.75"h Finished Size: 100"w x 83.75"h Visual Size: 98.25"w x 6"h

Template requires 1" bleed around the perimeter (2" around the perimeter when scaled to 200% and printed)

FS = Graphic is front side mounted (3/4" w velcro is applied to the back of the panel)
BS = Graphic is back side mounted (3/4" w velcro is applied to the front of the panel)
Notching = 7/8" square that is cut into the appropriate location.
Hinging= 3/4" strip of material that is created by notching the graphic. Allows two graphics to share the same extrusion corner.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 200-240 ppi @
 1/2 size, 100-120ppi @ 100% size
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

FS OR-G-LU2

panel is notched on top left and right corners

S OR-G-LU3

FS OR-G-LU4

panel is notched on top left and right corners